UPCBD2 Distribution Pedestal

Key Features

- Rugged metal housing made of mill-galvanized steel for durability and low maintenance costs
- Our unique multi-stage paint process meets or exceeds EPA standards, and provides a tough corrosion-resistant finish for longer life
- Factory installed stand-off bracket provides easy access to cable conductors
- Factory installed dielectric shield offers ultraviolet protection of cable conductors
- RUS accepted shield isolation bonding/grounding bracket assembly accommodates the RUS PE-91 requirements for cable shield isolation; 6 AWG grounding capability

The UPCBD2 houses terminations and splices of small pair-count buried cable.

Description

The UPCBD2 is a round-cornered, square-design telephone distribution pedestal accepted for use by the RUS. Included in the UPCBD2 are: a dielectric shield, stand-off bracket, and shield isolation bonding/grounding bracket assembly.

Application

The UPCBD2 houses terminations and splices of small pair-count buried cable. Specific applications include termination of all types of service wires and housing all types of splicing arrangements.

Additional Information

Installation information is available in Installation Manual 631-200-015.

EMERSON
Network Power

Recommended Terminal Block Capacity

Catalog Number	— Terminal Blocks — 6-Pair Unprotected	1-Pair Protected	3-Pair Protected	— Total Splice — Pairs	
	145B	281VSR2	381VSR2	RUS Accepted	Recommended
UPCBD2	3	3	3	3 pair	12 pair

Note 1: Total number of pairs spliced is dependent on connector use and local practices.

Note 2: Above terminal block recommendations relate to mounting on either the stand-off brackets [Catalog Number SB234 (Part No. F604110)] or offset brackets [Catalog Number OB2 (Part No. F602730)]. Also, additional positive grounding must be provided when using a protected block. In the above protected blocks, "VSR2" denotes gas-tube protection.

Ordering Information

Catalog Number	Part Number	Description
UPCBD2*	F604840	4-in. gray-green pedestal
Accessories		
P34419	F534419	Dielectric shield
SB234	F604110	Stand-off bracket
GBRBD2	F605113	Bonding and grounding bracket assembly
OB2	F602730	Mounting bracket
MS1332	F602132	32-inch mounting stake
MS1342	F604080	42-inch mounting stake
TF75	F600490	1/4-20 security bolt
SWG	F600270	Grommet, green rubber 3/4" service wire. 50 per pkg.

* Equipped with SB234 bracket.

Note: Stakes and additional mounting hardware are not included and may be ordered separately.

Dimensions

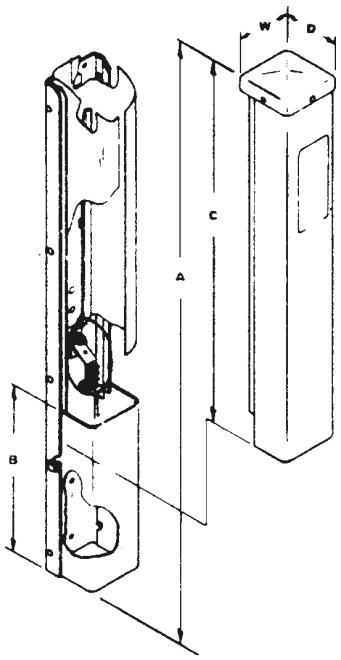

A	B	C	D	E
36.5 "	12"	24.5"	4"	4"

EmersonNetworkPower.com/EnergySystems (North America)
EmersonNetworkPower.eu/EnergySystems (EMEA)

© Emerson Network Power, Energy Systems, North America, Inc. 2014.

Business-Critical Continuity™, Emerson Network Power™, the Emerson Network Power logo, Emerson™ and Consider it Solved are service marks and trademarks of Emerson Electric Co. EnergyMaster™, eSure™, NetPerform™, NetReach™, NetSpan™, NetSure™ and NetXtend™ are trademarks of Emerson Network Power, Energy Systems, North America, Inc. Any other product, brand, or company names or logos are the property of the respective owner.

While every precaution has been taken to ensure accuracy and completeness herein, Emerson Electric Co. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications subject to change without notice.

EMERSON. CONSIDER IT SOLVED.™